


Client: \_\_\_\_\_

Date: \_\_\_\_/\_\_\_\_/\_\_\_\_

Desired supply date: \_\_\_\_/\_\_\_\_/\_\_\_\_

## 01. INSTALLATION LOCAL:

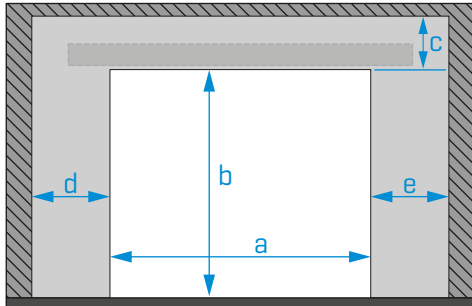

Quantity


### Local dimensions [mm]:

**Mandatory filling**  
← follow scheme


- a [Clear passage width]
- b [Clear passage height]
- c [Lintel]
- d [Left lateral]
- e [Right lateral]

[machine size]  [width of leaf/clamps/frame]  [height of frame]


## 03. FINISHING OF SAFE / FRAME:



Fixation glass drilling F1



Fixation glass grip F2



Aluminium frame profile

C048 System

Anti-storm kit

Other devices/  
accessories:

### SAFE

**Textured finishing** [standard]:

- Natural anodized
- White powder coating - RAL9003
- Black powder coating - RAL9005

Another workmanship:

Lacquering | RAL color

### FRAME OR CLAMP

**Textured finishing** [standard]:

- Natural anodized
- White powder coating - RAL9003
- Black powder coating - RAL9005

Another workmanship:

Lacquering | RAL color

## 02. ADDITIONAL DEVICES:

X Complete with X  
1, etc.

- M1601 - Radar
- RAP50 - Radar
- MR30 - Radar with photocells  
 Ceiling fixing plate
- RAP100S - Radar with photocells
- FOT09S1A - Photocells
- MELE01 - Electric lock
- MR10 - Receiver
- FALK - Remote controls
- MB18 - Touch sensor
- SINTACT - No touch sensor
- MB17 - No touch sensor

## 04. GLASS

Only available in the model with frames

Tick if you want to order the  
glass for the door  
\*

**Mandatory completion of the  
production form**  
[available on the following pages]

## 05. NUMBER OF LEAFS AND ORIENTATION:

[SELECT DESIRED OPTIONS WITH AN X]

**1**

- 1 mobile leaf
- Open to Left

**2**

- 1 mobile leaf
- Open to Right

**3**

- 2 mobile leaves

**4**

- 1 mobile leaf
- 1 fixed leaf
- Open to Left


**5**

- 1 mobile leaf
- 1 fixed leaf
- Open to Right

**6**

- 2 mobile leaves
- 2 fixed leaves

## 06. OVERLAP:

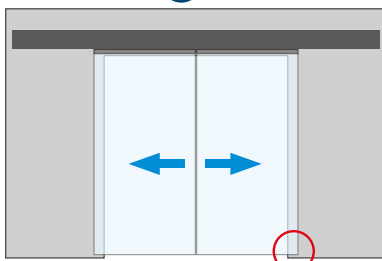

In closed mode, a small overlap of the glass leaves with the wall is recommended for sealing, generally between 25 to 50mm.

For doors with profiles, for a better framing, is recommended an overlap of 55mm.


Please mark below the size of the overlap you want:

\_\_\_\_\_




Must only send this sheet if you want the glass leaves to be provided with the automatism.

**APPLICATION MODE - SIMPLE GLASS LEAF :**  
[SELECT WITH X THE DESIRED OPTION]

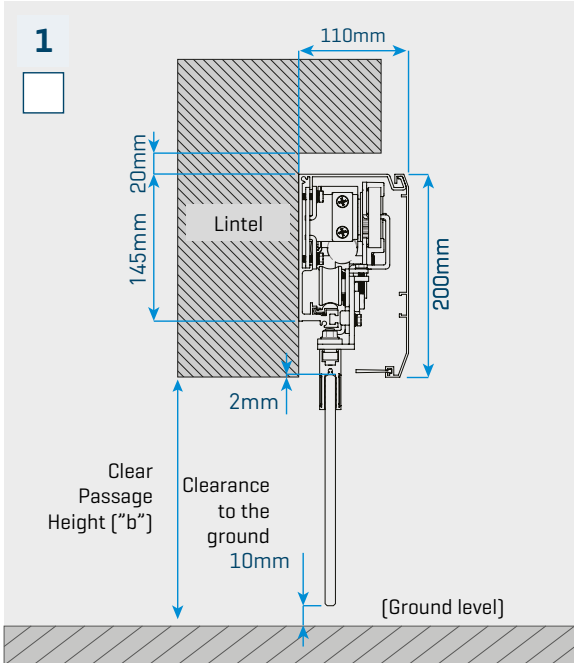

**Semi-visible mode**

Glass fixing profile stays visible from the outside [220mm of minimum lintel].

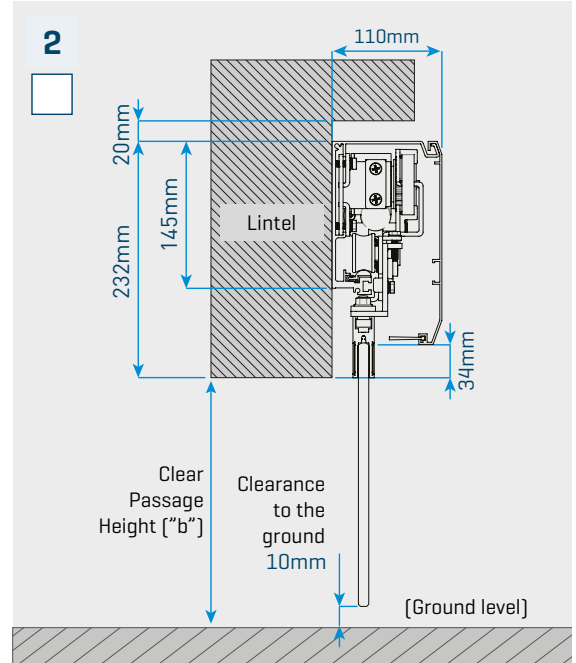

**Invisible mode**

Glass fixing profile stays hidden behind the lintel [252mm of minimum lintel].

**GLASS PRODUCTION:**



**Use only 10mm TEMPERED GLASS**

We are not responsible if another type of glass is used.

**SEMI-VISIBLE MODE:**

$$\begin{matrix} \text{Height} & \text{Clear} \\ \text{Glass} & = & \text{Passage} & - & 8\text{mm} \\ \text{Leaf} & & \text{Height} & & \end{matrix}$$


**INVISIBLE MODE:**

$$\begin{matrix} \text{Height} & \text{Clear} \\ \text{Glass} & = & \text{Passage} & + & 24\text{mm} \\ \text{Leaf} & & \text{Height} & & \end{matrix}$$

**Example:**

If you choose the "Semi-Visible mode" and have a clear passage height of 2000mm, then the glass leaf height must be 1992mm [2000-8].

**HOLES ON GLASS LEAF FOR FIX KIT:**

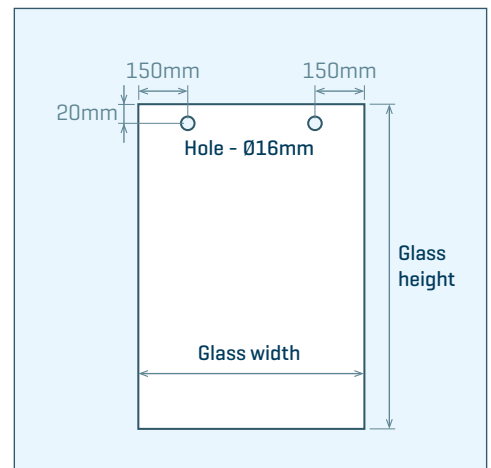

**OBSERVATIONS:**

[In this space you should describe everything you find relevant to the automatism production]




---



---



---




---



Must only send this sheet if you want the aluminum frames and/or glass leaves to be provided with automatism. Please refer in the "Observations" field if you want frames, glass or both.

## APPLICATION MODE - ALUMINUM FRAME

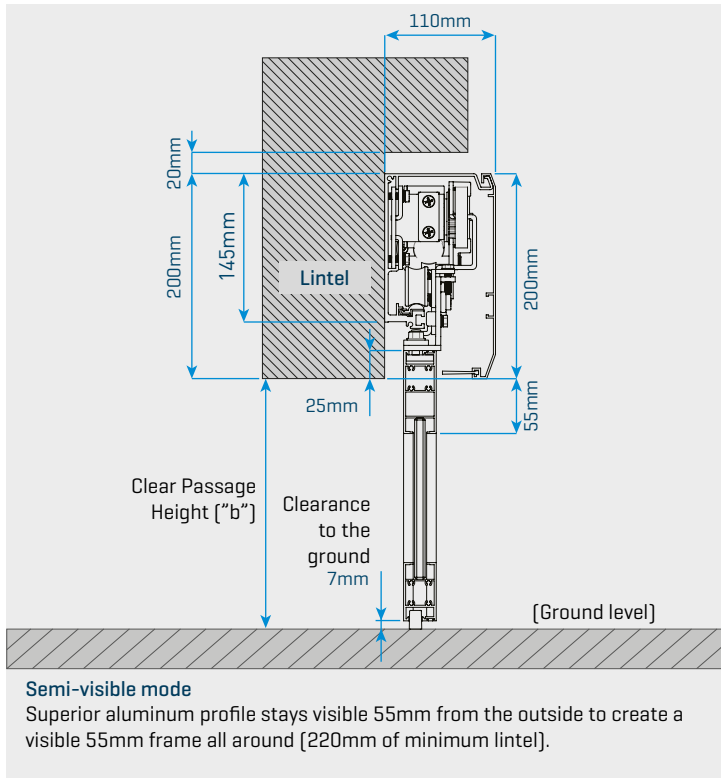

$$\text{Height Mobile Leaf} = \text{Clear Passage Height} + 18\text{mm}$$


## GLASS PRODUCTION:

GLASS TYPE:

\_\_\_\_\_

### Example:

If you choose the "Semi-Visible mode" and have a clear passage height of 2000mm, then the glass mobile leaf height must be 1903mm [2018 - 115].

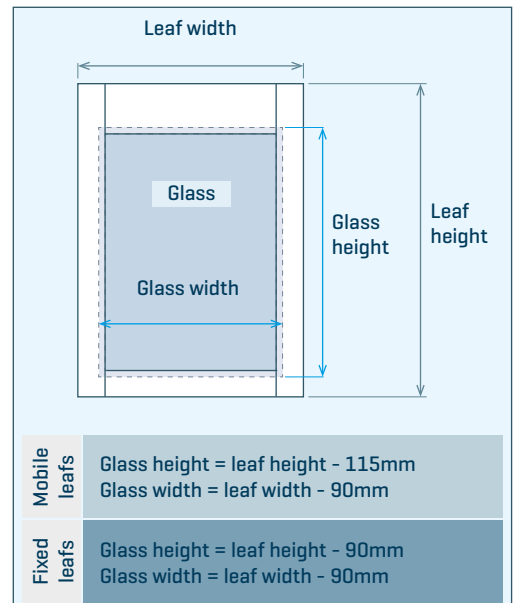

## OBSERVATIONS:

[In this space you should describe everything you find relevant to the automatism production]

---



---



---




---



Must only send this sheet if you want the glass leaves to be provided with the automatism.


## APPLICATION MODE - SIMPLE GLASS LEAF WITH LOWER F1 FIXING KIT:

[SELECT WITH X THE DESIRED OPTION]

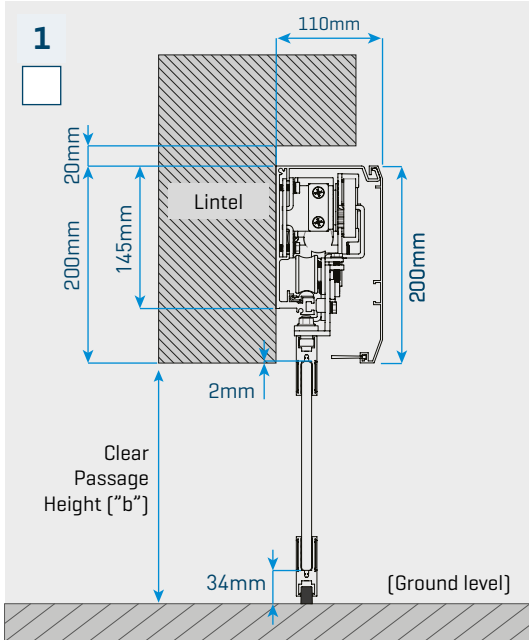

### 1

**Semi-visible mode**  
Glass fixing profile stays visible from the outside  
[220mm of minimum lintel].

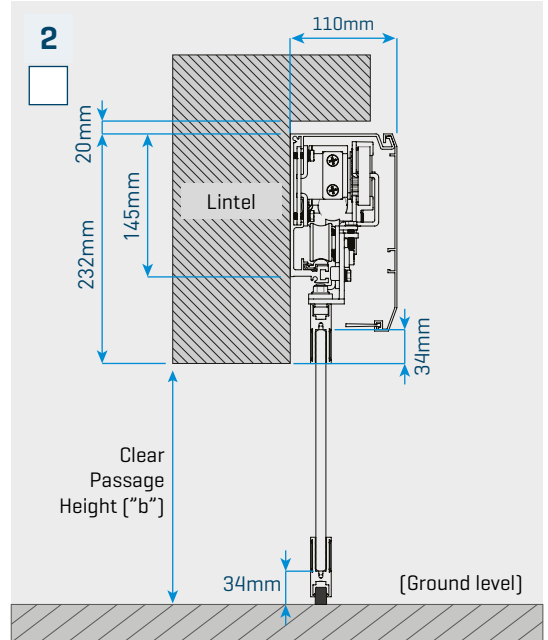

### 2

**Invisible mode**  
Glass fixing profile stays hidden behind the lintel  
[252mm of minimum lintel].

## GLASS PRODUCTION:



**Use only 10mm TEMPERED GLASS**

We are not responsible if another type of glass is used.

## SEMI-VISIBLE MODE:

$$\begin{matrix} \text{Height} & = & \text{Clear} \\ \text{Glass} & = & \text{Passage} - 32\text{mm} \\ \text{Leaf} & = & \text{Height} \end{matrix}$$


## INVISIBLE MODE:

$$\begin{matrix} \text{Height} & = & \text{Clear} \\ \text{Glass} & = & \text{Passage} \\ \text{Leaf} & = & \text{Height} \end{matrix}$$

### Example:

If you choose the "Semi -Visible mode" and have a clear passage height of 2000mm, then the glass leaf height must be 1968mm (2000-32).

## HOLES ON GLASS LEAF FOR FIX KIT:

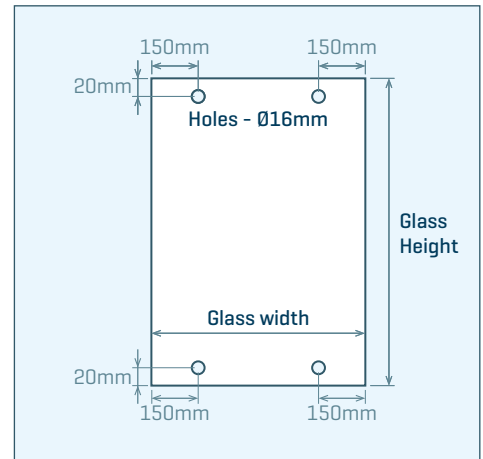

## OBSERVATIONS:

[In this space you should describe everything you find relevant to the automatism production]




---



---



---





---



Must only send this sheet if you want the glass leaves to be provided with the automatism.

## APPLICATION MODE - SIMPLE GLASS LEAF WITH F2 CLAMP:

[SELECT WITH X THE DESIRED OPTION]

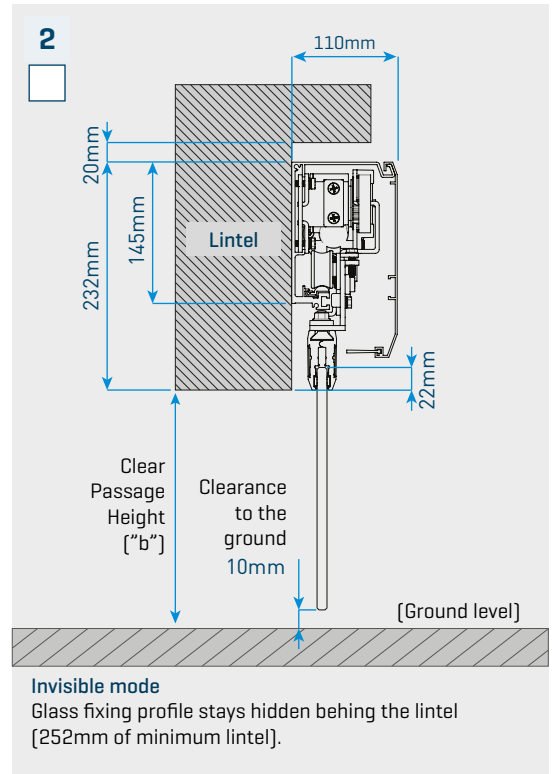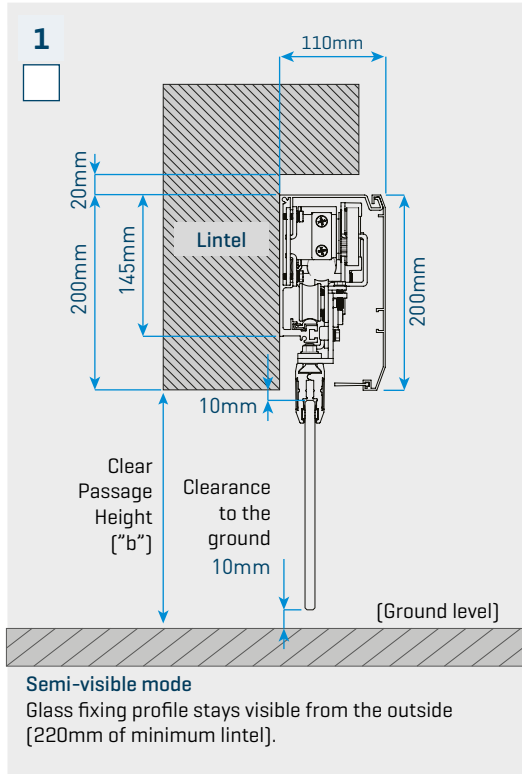

### GLASS PRODUCTION:

GLASS TYPE:

---

#### Example:

If you choose the "Semi-Visible mode" and have a clear passage height of 2000mm, then the glass leaf height must be 1980mm [2000 - 20].


### SEMI-VISIBLE MODE:

$$\begin{array}{l} \text{Height} \\ \text{Glass} \\ \text{Leaf} \end{array} = \begin{array}{l} \text{Clear} \\ \text{Passage} \\ \text{Height} \end{array} - 20\text{mm}$$

### INVISIBLE MODE:

$$\begin{array}{l} \text{Height} \\ \text{Glass} \\ \text{Leaf} \end{array} = \begin{array}{l} \text{Clear} \\ \text{Passage} \\ \text{Height} \end{array} + 12\text{mm}$$

### OBSERVATIONS:

[In this space you should describe everything you find relevant to the automatism production] 

---



---





---



---

**!** Must only send this sheet if you want the glass leaves to be provided with the automatism.

**APPLICATION MODE - SIMPLE GLASS WITH F2 GLAMP AND F1 INFERIOR FIXING KIT:**   
 [SELECT WITH X THE DESIRED OPTION]

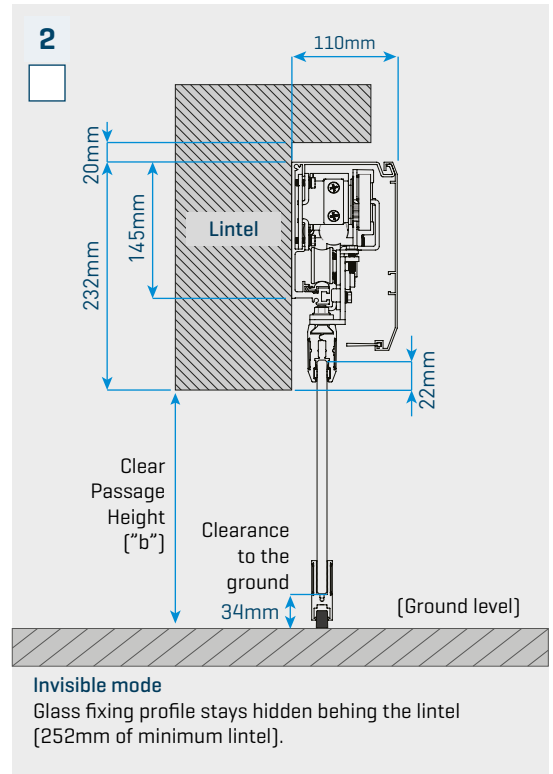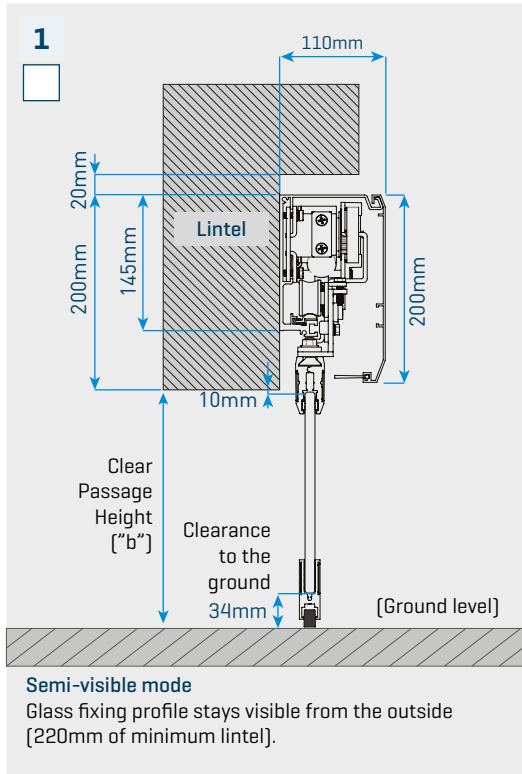

**GLASS PRODUCTION:** 

GLASS TYPE:

---

**Example:**  
 If you choose the "Semi-Visible mode" and have a clear passage height of 2000mm, then the glass leaf height must be 1956mm [2000 - 44].


**SEMI-VISIBLE MODE:**

$$\begin{matrix} \text{Height} & & \text{Clear} \\ \text{Glass} & = & \text{Passage} \\ \text{Leaf} & & \text{Height} \end{matrix} - 44\text{mm}$$

**INVISIBLE MODE:**

$$\begin{matrix} \text{Height} & & \text{Clear} \\ \text{Glass} & = & \text{Passage} \\ \text{Leaf} & & \text{Height} \end{matrix} - 12\text{mm}$$

**OBSERVATIONS:**

[In this space you should describe everything you find relevant to the automatism production] 

---



---



---



---