


Client:

Order reference

Date:

Delivery desired date:

01. INSTALLATION AREA

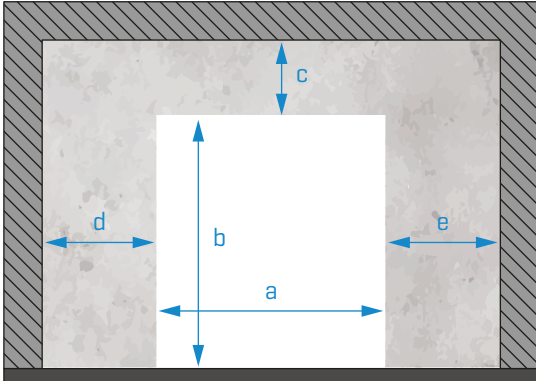

Quantity

Local dimensions (mm):



MANDATORY FILLING

a


b

c

d

e

PVC color:



Other:

MOTOR AND CONTROL BOARD POSITION:

Motor installed on the left

Motor installed on the right

Control Board installed on the left

Control Board installed on the right

Additional devices:

MPR020

Magnetic loop

Tunnel kit

Remote control

Anti-storm kit

Radars

UPS [Price on request]



Model

All doors are lacquered in RAL9010

Textured

If you want another colour or finish, please mention here:

STAINLESS STEEL 304


STAINLESS STEEL 316

Without transparent strip


Mark if you **do not want** transparent strip

Other Options:

02. ORIENTATION OF THE STRAPS AND PVC WINDING

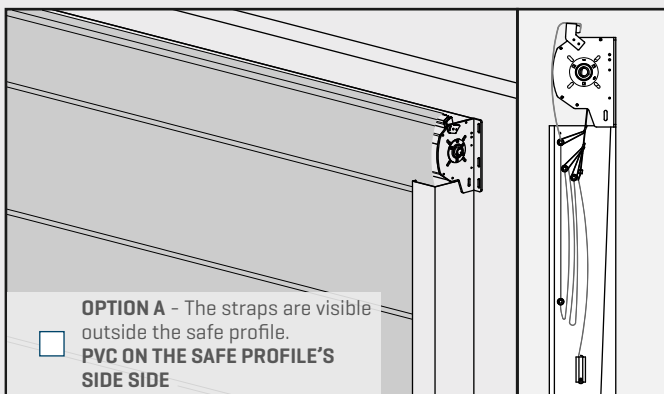

OPTION A - The straps are visible outside the safe profile.
PVC ON THE SAFE PROFILE'S SIDE SIDE

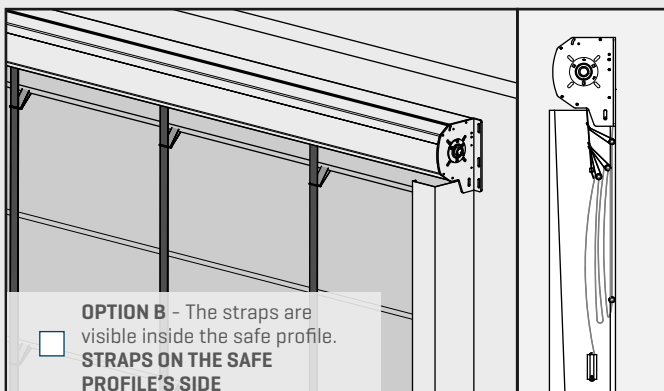

OPTION B - The straps are visible inside the safe profile.
STRAPS ON THE SAFE PROFILE'S SIDE

INFORMATION

[See pages 2 and 3]


HEIGHT	WIDTH															
	3	3,5	4	4,5	5	5,5	6	6,5	7	7,5	8	9	10	11	12	13
3																
3,5																
4																
4,5																
5																
5,5																
6																
6,5																
7																
7,5																
8																
9																
10																

OBSERVATIONS:

IN THIS SPACE YOU SHOULD DESCRIBE AND/OR DRAW EVERYTHING YOU FIND RELEVANT TO THE AUTOMATISM PRODUCTION

03. TECHNICAL DRAWING [DOORS UP TO 6500mm WIDTH]

Dimensions shown in mm

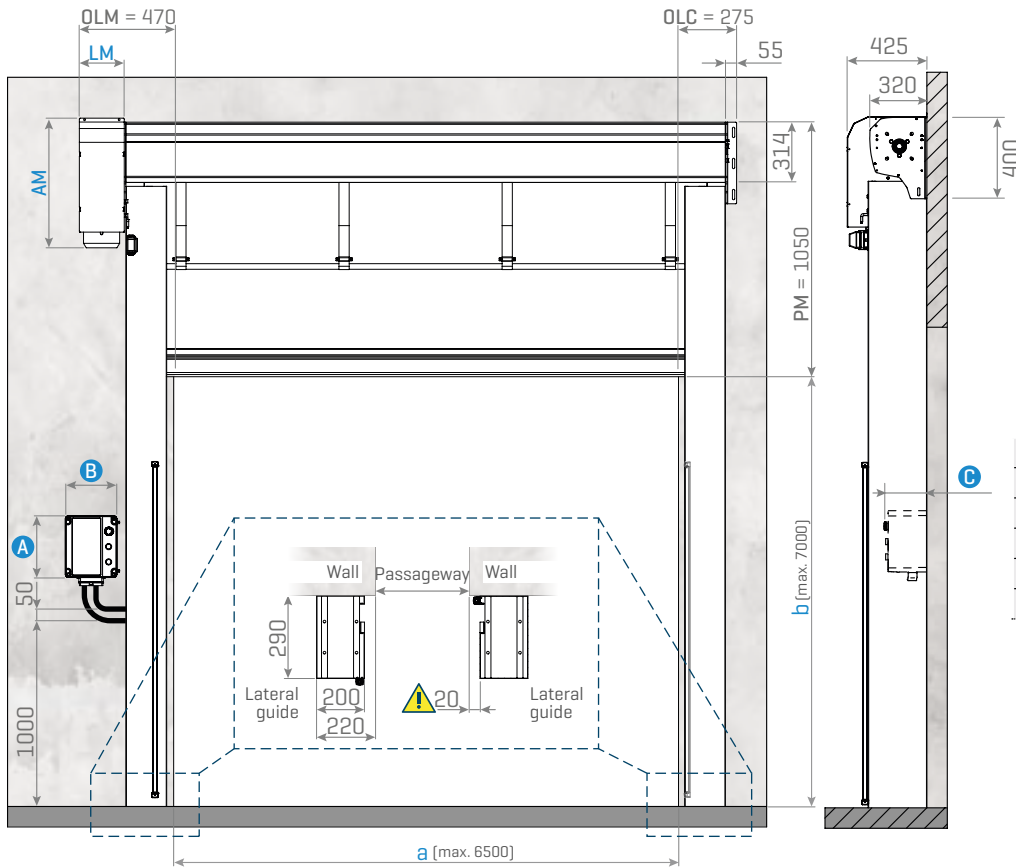

	PILE 1	PILE 2	PILE 3	PILE 4
LM	248	248	248	248
AM	620	665	665	665
A	300	300	400	400
B	250	250	300	300
C	185	185	200	200


Legend:

- PM - Minimum Lintel;
- OLM - Motors side clearance;
- LM - Motor Width;
- OLC - Opposite Side clearance;
- AM - Motor Height;

⚠ To protect the lateral guides, installation is carried out 20mm outside the passageway [dimension a].

04. TECHNICAL DRAWINGS [DOORS OVER 6500mm WIDTH]

Dimensions shown in mm

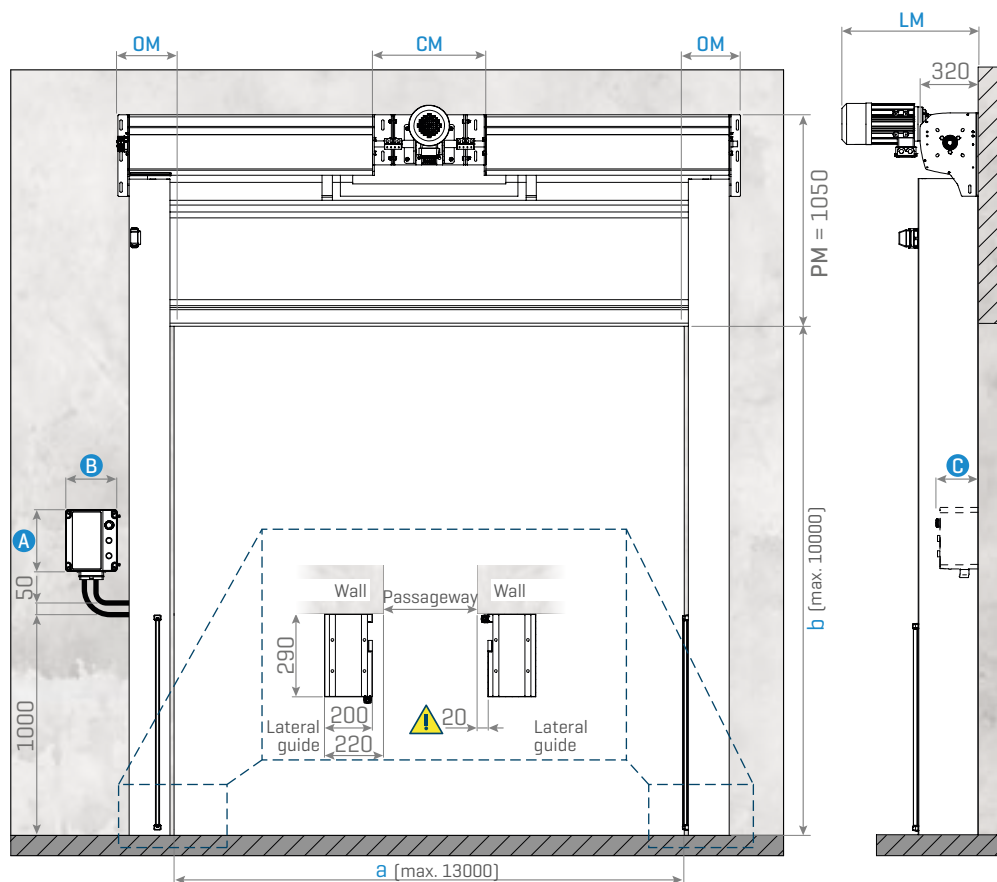

	PILE 2	PILE 3	PILE 4	PILE 5
CM	555	555	555	650
LM	665	665	655	745
OM	275	275	275	290
A	300	400	400	400
B	250	300	300	300
C	185	200	200	200


Legend:

- PM - Minimum Lintel;
- OM - Minimum side clearance;
- CM - Motor Length;
- LM - Motor Width;

⚠ To protect the lateral guides, installation is carried out 20mm outside the passageway [dimension a].

05. TECHNICAL DRAWING - TUNNEL KIT (DOORS UP TO 6500mm WIDTH)

Dimensions shown in mm

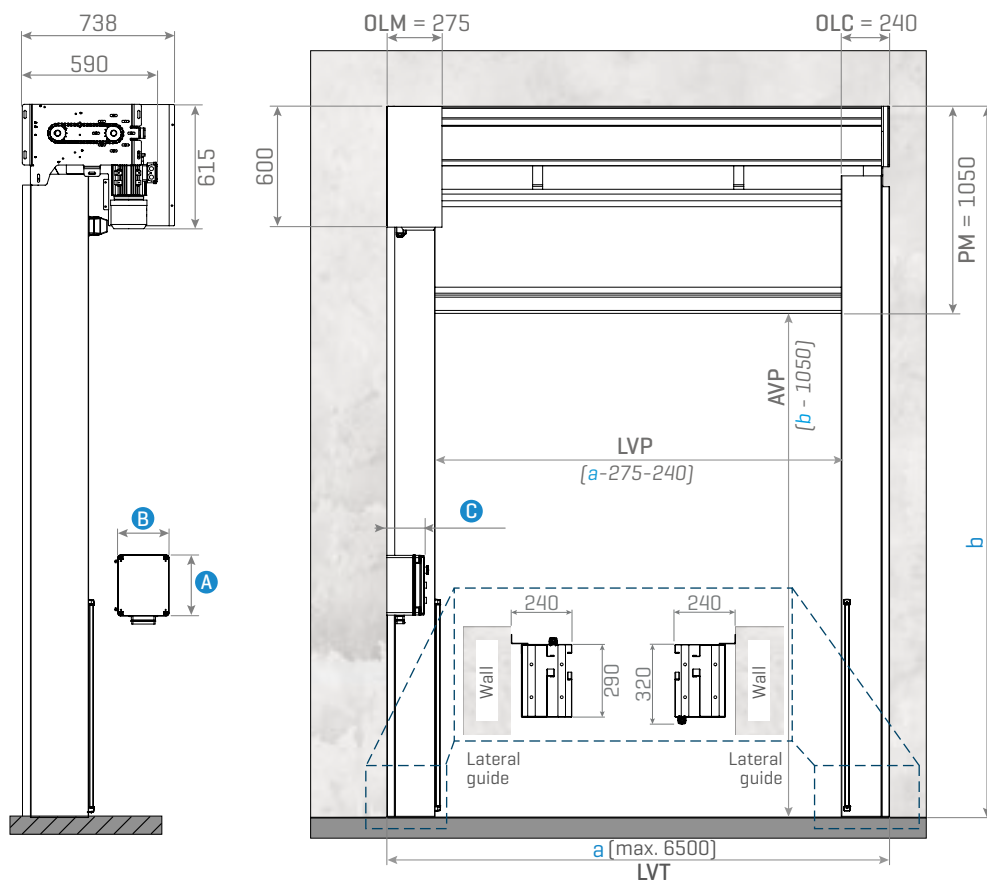


	PILE 1	PILE 2	PILE 3	PILE 4
A	300	300	400	400
B	250	250	300	300
C	185	185	200	200

Legend:

PM - Minimum Lintel;
 LVP - Passageway Width;
 LVT - Total Passageway Width;
 AVP - Passageway Height;
 AVT - Total Passageway Height

06. TECHNICAL DRAWING - TUNNEL KIT (DOORS OVER 6500mm WIDTH)

Dimensions shown in mm

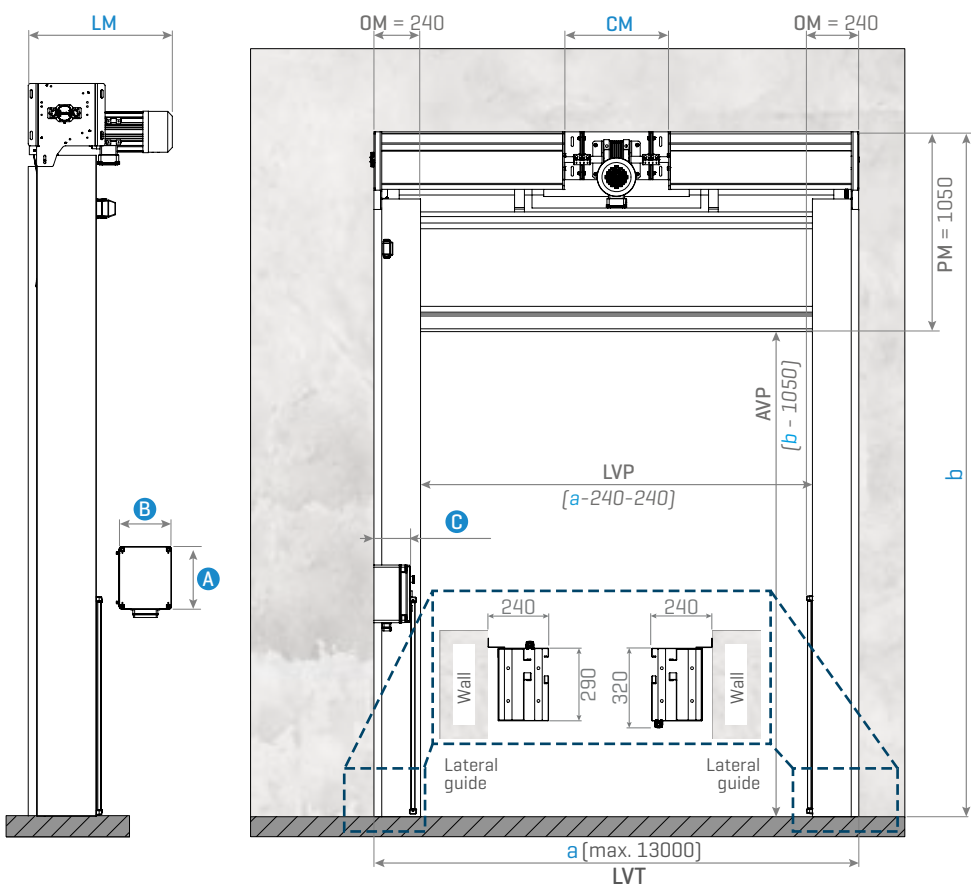

	PILE 2	PILE 3	PILE 4	PILE 5
CM	555	555	555	650
LM	695	695	695	795
A	300	400	400	600
B	250	300	300	400
C	185	200	200	200

Legend:

OM - Minimum side clearance;
 CM - Motor Length;
 LM - Motor Width;
 PM - Minimum Lintel;
 LVP - Passageway Width;
 LVT - Total Passageway Width;
 AVP - Passageway Height;
 AVT - Total Passageway Height